

Outdoor Air Conditioner OC 5708-400V



Product Description

Brand name:	SoliTherm ComPact Outdoor
Order Number:	570820001
Colour:	RAL 7035
Protection category IP (IEC 60 529):	IP 56 (NEMA 12, 3, 3R, 4)
Approvals:	CE
Customs tariff number:	84158200
Material housing:	Mild steel, powder coated

Technical data OC 5708-400V

Cooling capacity / output L35L35:	750 W @ 50 Hz
	780 W @ 60 Hz
Cooling capacity / output L35L50:	470 W @ 50 Hz
	510 W @ 60 Hz
Heating capacity:	400 W (optional)
Compressor:	Reciprocating compressor
Refrigerant:	R134a
Refrigerant charge:	235 g
Operating temperature range:	-20°C - +55°C
Max. air volume flow:	Ambient air circuit: 315 m ³ /h
	Cabinet air circuit: 165 m ³ /h
Mounting:	External
Dimensions (H x W x D):	830 x 304 x 270 mm
Weight:	35 kg
Cut out dimensions:	265 x 180, 265 x 160 mm
Rated operating voltage / frequency:	400/460 V - 50/60 Hz 2~
Rated current L35L35:	2.2 A @ 400V
	1.9 A @ 460V
Starting current:	6 A @ 400V
	5 A @ 460V
Max. current:	2.4 A @ 400 V
	2.1 A @ 460 V
Power consumption L35L35:	580 W
Max. power consumption:	860 W
Fuse rating:	2 x 3 A (T)
Connection:	Connection terminal block

Click the graphics to download the originals.


More CAD graphics can be found on our [Products Downloads page](#).

> [Overview product group Cooling units - Outdoor](#)


Performance Graph:

T = Ambient temperatur

P = Cooling capacity

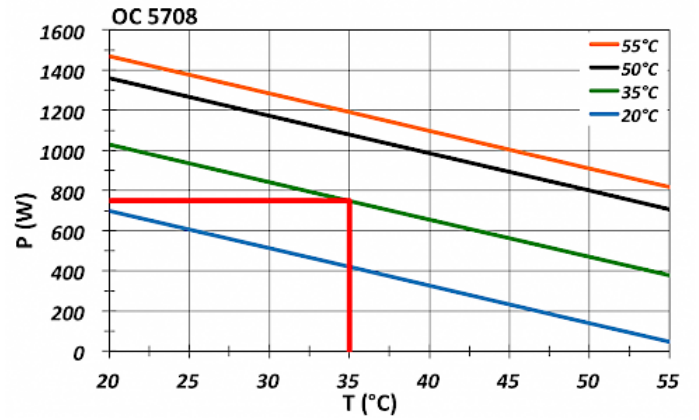

click image to enlarge

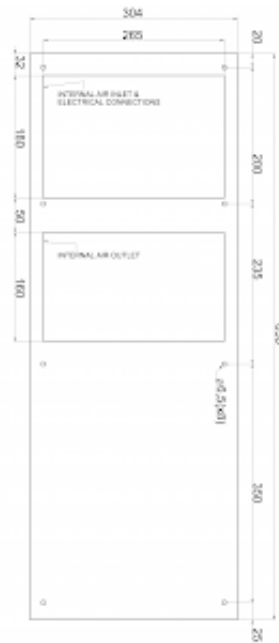Cutout diagram:


click image to enlarge

[Datasheet](#) created 22.07.2015 (10:18:33). Technical rights reserved.